

Every parent demands and expects high standards of safety when it comes to their child. Ensuring these standards are met, is a responsibility thrust upon every school.

We at Ashok Leyland extend our support in sharing this responsibility, and providing you with a state-of-the-art transport solution that ensures the highest standards of safety. With an ultra-low entry slide-step, the A+ Stag range of school buses allows even the little ones to board and alight without assistance. In addition to individual seat belts to secure children to their seats, hand-rests on the aisle seats also keep them safe and prevent them from falling off in case of sharp turns. The large windows are guarded with grills so children can safely enjoy the fresh air without fear. The A+ Stag leaves nothing to chance and comes equipped with a fire extinguisher, clearly demonstrating the seriousness with which safety features have been tackled. The bus also allows for two large exits in case of emergencies.

The A+ Stag without doubt provides a comfortable travel experience that is also economic and trouble-free. Together we shall carry the future-shapers of our nation to school.



Ultra-low entry slide-step



Seat belts



Fire extinguisher



Large emergency exit window



## Window railings for safety

Emergency exit door





Hand-rests



Notice board for announcements





Contemporary and service-friendly interiors

TECHINICAL SPECIFICATIONS			
	BSIII Chassis / Fully-built		
Engine	'H' series 4CTI electronically controlled		
Maximum power	120 ps @ 2400 rpm		
Maximum torque	41 kgm @ 1600 rpm		
Clutch	310 dia single plate dry-type, hydraulic actuation		
Gearbox	5-speed ZF synchromesh gearbox		
Frame	All steel ladder-type		
Front axle	I Section Reverse Elliot-type		
Rear axle	4.56		
Brakes	Full-air dual-line S-cam brakes		
Parking brakes	Spring actuated, pneumatic (on rear only)		
Wheel base	3600	4200	4900
Seating capacity	28 + D	34 + D	40 + D
Suspension	Semi-elliptic multi-leaf with shock absorbers in front and rear		Parabolic multi-leaf with shock absorber in front and rear
Battery	12 V-120 Ah	12 V-120 Ah	12 V - 120 Ah
Tyres	7.50 x 16 - 16 PR	7.50 x 16 - 16 PR	8.25 x 16 - 16 PR
Front overhang (chassis)	1404	1404	1404
Rear overhang (chassis)	2160	2520	2940
Overall length (chassis)	7164	8124	9390
Overall width	2134	2134	2200
Front track	1753	1753	1753
Rear track	1617	1617	1713
Min. ground clearance	200	200	225
GVW (kgs)	7500	7500	9300
(All dimensions are in mm)			

## Stag New-Look 3600 mm WB - 28 + D - Standard seats


## Stag New-Look 4200 mm WB - 34 + D - Standard seats

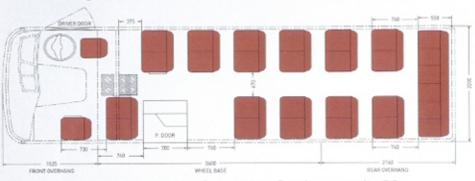

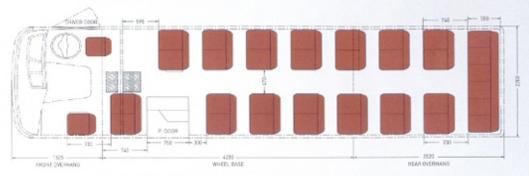

Double Door Option: Stag 3600 - Seating capacity 26

Double Door Option: Stag 4200 - Seating capacity 32

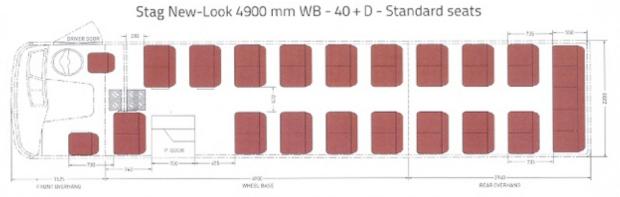

Double Door Option: Stag 4900 - Seating capacity 38

Specifications are subject to change due to continuous improvements and are for reference only.











